


WULFTEC® STRETCH WRAPPERS

SMLCA-277 AUTOMATED CONVEYORIZED TURNTABLE

THE SMLCA-277

AN AUTOMATED TWIN STATION
CONVEYORIZED STRETCH WRAPPER

*Save time! With the accumulation conveyor, the machine is always ready for the next load...
...READY TO WRAP*



Proven Cut & Wipe System

*Get the film tail
wiped to the load!
No relying on film snapping
back to the load*



**INCREASE FORKLIFT EFFICIENCY,
REDUCE LOAD HANDLING,
REDUCE DAMAGES**

- REAL LABOR SAVINGS**
- DUAL STAGING POSITION**
- INCREASE THROUGHPUT**
- EASY TO USE - A SIMPLE AUTOMATIC**
- WRAP & UNLOAD SIMULTANEOUSLY**



THE WULFTEC PROMISE

Having a Wulftec® stretch wrapping machine on the production line is a powerful statement. It's an investment in strong values, because Wulftec is dedicated to manufacturing only the best. It's an investment in all-steel construction, for increased stability and strength. It's an investment in success, because Wulftec® equipment is designed and built to wrap load after load...year after year.



WE FEAR NO PACKAGING CHALLENGE

WWW.WULFTEC.COM



WE FEAR NO PACKAGING CHALLENGE



WWW.WULFTEC.COM

M.J. MAILLIS

TECHNICAL SPECIFICATIONS

WULFTEC.com

PRODUCTION RATE*	Up to 55 loads per hour
MAX LOAD WEIGHT	4,000 lbs
MIN LOAD SIZE	36"W x 36"L x 10"H
MAX LOAD SIZE	48"W x 48"L x 80"H
MACHINE DIMENSIONS**	136½"W x 131½"L x 99"H
APPROX. SHIPPING WEIGHT	4,170 lbs
ELECTRICAL REQUIREMENTS***	120V/1/60 15A
PNEUMATIC REQUIREMENTS	3 CFM @ 80 PSI comes with FR (Filter, Regulator)
CONTROLS	<ul style="list-style-type: none"> - Top cover pause switch - Remote Start/Stop pull cord - Separate top and bottom wrap selection (0-9) - Separate up and down carriage speeds - Reinforced wrap
FILM DELIVERY SYSTEM	<ul style="list-style-type: none"> - 20" NO-THREAD® powered pre-stretch carriage with revolutionary spring loaded carriage gate - 1 HP AC motor with variable frequency drive
FILM TAIL TREATMENT	<ul style="list-style-type: none"> - Automatic film clamping - Pulsed-controlled cutter - Film alignment arm and brush on film treatment
TURNTABLE DRIVE	<ul style="list-style-type: none"> - Up to 12 RPM variable speed - 1 HP AC motor with variable frequency drive - #50 ANSI heavy-duty chain drive
CONVEYOR	<ul style="list-style-type: none"> - 5' gravity roller conveyor - Heavy-duty ball bearings - 2½" dia. rollers on 3" centers - 52" between frame rails
STRUCTURE	<ul style="list-style-type: none"> - Forklift portable base design - Heavy-duty structural steel construction - Ergonomically friendly film loading carriage position
WARRANTY	<ul style="list-style-type: none"> - 5-year unlimited cycle warranty - 10-year warranty on steel structure - Lifetime warranty on pre-stretch rollers' blue compound

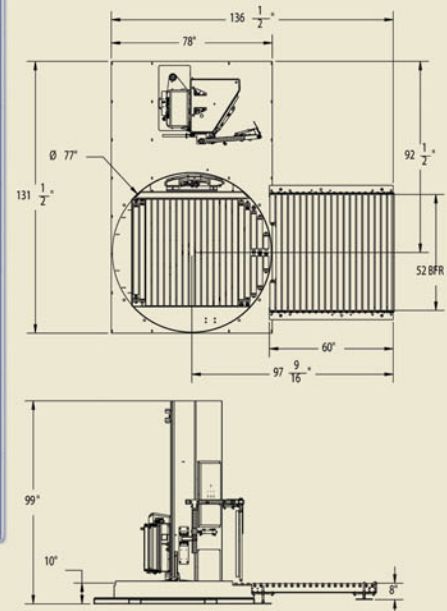

FEATURING




20" NO-THREAD® powered pre-stretch carriage for quick, easy, ergonomic and safe film loading / 50% to 400% pre-stretch for optimal film use and reduced costs / with our revolutionary spring loaded carriage gate, our carriages are "maintenance free"



Cut & Wipe film treatment system eliminates the need to attach and cut film, minimizing operator involvement and guaranteeing a tight wrap with no film tail for worry-free transport



AC variable frequency drives and motors for safe, reliable performance and minimal maintenance



Enclosed dual chain carriage lifts for increased safety / the dual chain system improves machine security and ensures stable lifting thus eliminating vibrations



All steel structure, no plastic... All Wulftec structures are built with heavy-duty steel for rugged performance, in even the harshest work environments. **They're built strong to last!**



Reduced energy usage by throughput anticipation: Machine will operate at a lower speed when the throughput from the line is slower and speed up to allow production bursts. For an average production line[†], the energy savings would equal 20 x 40 watt lamps lit for 6 hours!

Reduced film waste by optimized resolution: We now use a higher resolution positioning system to deliver the film in a more accurate quantity. This means an average film reduction of 4 feet of film per pallet when compared to other control systems! That's 60 miles[†] of unstretched film per year!

Reduced general waste by better product protection for handling and transport: With very low wrap capability, the product is properly secured to the pallet, resulting in a pallet that is more stable for transport and therefore less damage!

Reduced electricity consumption: By using variable frequency drives on all its motors, Wulftec ensures that only the power required by the load is used, regardless of the HP of the motor. By this, we have standardized our motor sizes, allowing for less parts in inventory for us and our customers. This translates into greener operations at our end and at your end.



*PRODUCTION RATE BASED ON LOAD SIZE AND MACHINE CONFIGURATION
 **MACHINE HEIGHT CAN EXCEED BY UP TO 8" WHEN CARRIAGE IS IN UPMOST POSITION
 ***OTHER VOLTAGE AVAILABLE UPON REQUEST
 †BASED ON A PRODUCTION RATE OF 60 PALLETS PER HOUR, 2 SHIFTS, WHERE 50% OF THE PRODUCTION IS IN "PEAK-MODE", 250% PRE-STRETCH
 ALL MACHINE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
 NOMINAL DIMENSIONS SHOWN